


Custom Cut Mat Measuring Tips

There are many ways to measure for your custom mat, here is one suggestion to use. Use thumb tacks and a tape measure. If you are working on a hard surface, you can use chalk or an erasable marker. Set the pins in the carpet to mark each corner and 'connect-the-dots'. Provide measurements and an overall size of the mat, as shown in the example below.Do not crowd the mat against furniture or walls, leave at least 1/2" - 1 " space from the edges of the mat to any verticle surface to allow for installation and measuring inaccuracies.



All inside corners are cut with a nominal 1" radius. All outside corners are cut with a 2" radius.

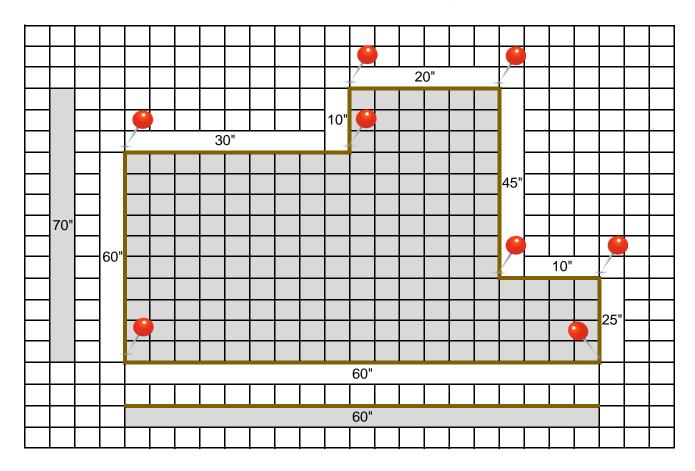

Custom Cut Quote

Customer Name:													Date:												
Address:									Phone:																
		E-N	/lail:																						
							₩																<u> </u>		
	 	<u> </u>					┼		-											-			-		
						<u> </u>	╁																-		
							 																		
							<u> </u>																		
	-						_																		
							+																		
	 	 					╁																-		
							t																		
						<u> </u>	<u> </u>																<u> </u>		
	-						_																		
																							<u> </u>		
Mat Series Selection:							Grand Teton Series Home Office/Executive Black Hills Series Commercial Carpet								Hot Springs Series AirFlow Carpet Mat Plains Series Hard Surface										
	Fax:					1-877-890-5231								Mail	:	Bison Mat Co. Attn: Custom Mat Quote									
E-mail:					Orders@BisonMat.com										11775 - 95th Ave N										

Maple Grove, MN 55369